WINDOW SCHEDULE


Let.	Rough Opening	Manufacturer	Type	Model No.	Remarks
G1	8'-0 1/2"x5'-0 7/8"	Andersen Windows 400 series	D.H. (mul.)	3-2841Ø	Provide tempered glass at bottom sash
G2	2'-8 1/8"x5'-0 7/8"	Andersen Windows 400 series	D.H.	2841Ø	Provide tempered at bathroom window
G3	2'-6 1/8"x4'-4 7/8"	Andersen Windows 400 series	D.H.	2642	
Ex	Existing window to remain				

NOTE: All windows shall have window limiters for fall protection. 4" max opening.


Insulation Schedule

Component	Required insulation	Remarks
Foundation wall	N/A	Garage will not be heated 4'
New Slab on grade	N/A	Garage will not be heated 4'
New 2x6 exterior wall framing	R-21 @ studs + R-6 sheathing	
Garage Ceiling/2nd Floor deck	R-30 + R-10 ci. below	
Attic	R-60	


All information is based on Climate Zone 5.

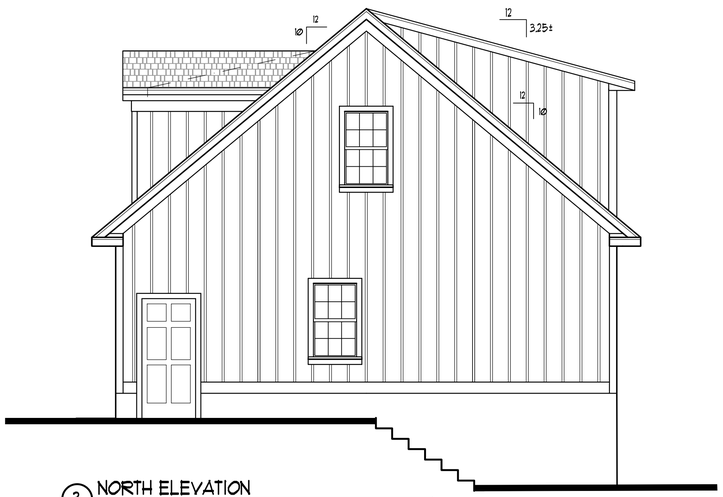

3 NORTH ELEVATION
SCALE: 1/4"=1'-Ø"

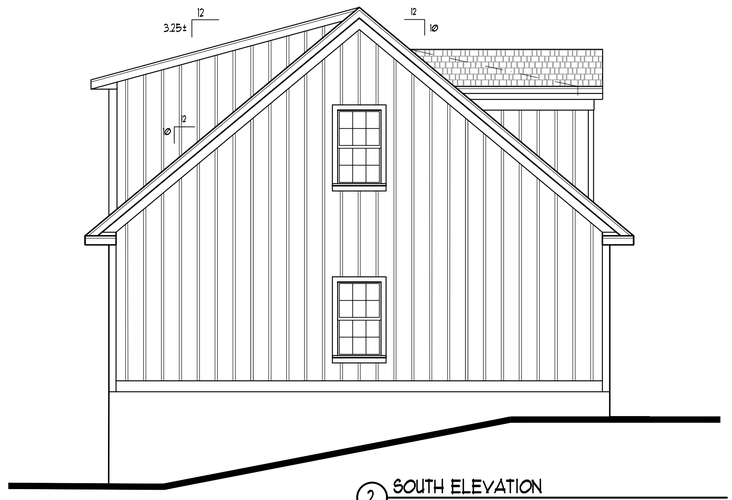


2 SOUTH ELEVATION
SCALE: 1/4"=1'-Ø"

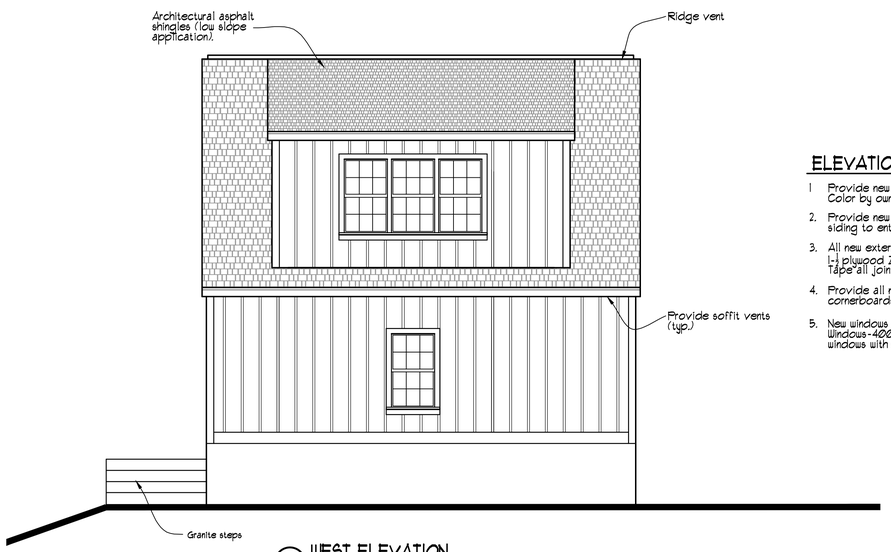

4 WEST ELEVATION
SCALE: 1/4"=1'-Ø"

ELEVATION NOTES:

1. Provide new architectural asphalt roof shingles. Color by owner.
2. Provide new board and batten wood siding to entire garage.
3. All new exterior wall sheathing shall be 1-1/2 plywood Zip R-sheathing (R-6). Tape all joints.
4. Provide all new 1x wood skirtboards, cornerboards, rake and soffits
5. New windows shall be Anderson Windows-400 Series, vinyl clad wood windows with simulated divided lights.

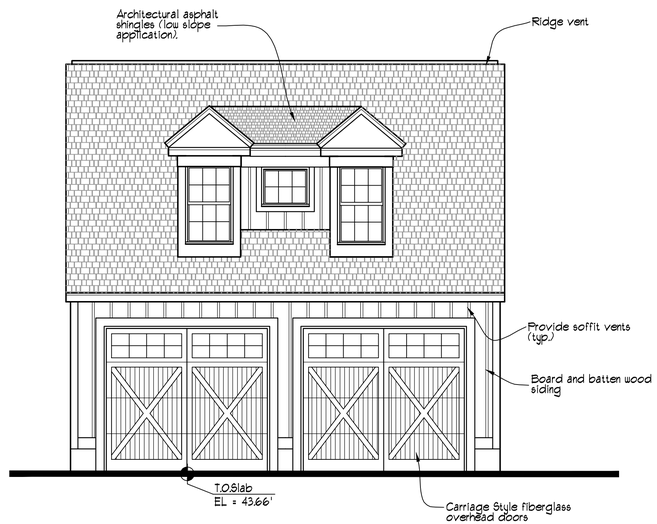

1 EAST ELEVATION
SCALE: 1/4"=1'-Ø"

PROPOSED ADDITION

Mulcahy Residence

55 MAIN STREET
EAST HADDAM, CT

David Goslin
Architect
1906 MAIN STREET P.O. BOX 412
EAST WINDSOR HILL, CT 06028
TEL (860) 289-4858

Garage Elevations

Date June 18, 2026
Drawn DG

G-2